

SLX-D

HERMETICALLY SEALED DOOR



In hospital clean-rooms, clinics or food production facilities, chemical and pharmaceutical industries, tightly sealed doors are indispensable. The tested automatic Gilgen SLX-D sliding door with patented pivoting mechanism prevents unwanted exchange of air as well as the penetration of foreign particles and impurities. With SLX-D the required pressure hierarchy is always consistently maintained.

Automatic door leaf locking

Automatic opening and closing ensures hygienic and barrier-free access whilst ensuring the correct operating procedure.

Automatic door leaf locking

- High degree of tightness
- Controlled hygiene
- High degree of sound insulation
- Fully tested system
 - TÜV-tested DIN 18650-1/2
 - Air permeability conforming to EN 12207, class 2



Possible applications

- Single door leaf sliding doors
- Wide range of door leaves
- Suitable for operating rooms, laboratories, pharmaceutical and food industries, music rooms, etc.

Functional and user-friendly

The complete range of selectable functions and available control and safety elements enables you to find the optimal solution for your situation.

User safety

The Combi-Scan and (depending to situation) the Side-Scan presence detectors integrated in the drive unit offer protection to door users staying in the range of movement of the door leaves.

Technical data - SLX-D hermetically sealed sliding door



Opening elements

Large optical pushbuttons and/or movement sensors integrated into the drive mechanism ensure smooth, hands-free access.



Controlled access

Pushbuttons, elbow-activated switches or other access systems can be selected for a controlled opening.




Door-opening in event of a power failure

The operating lever allows you to open the door manually in the event of a power failure, even if there are differences in pressure.

During the closing movement, the pivoting mechanism integrated into the drive unit causes the wing to be simultaneously lowered and pressed against the door frame. The lowering movement and allround gaskets provide the door with a hermetic seal.

The drive mechanism, door leaf surface and seals have been designed to withstand all commonly used cleaning products and the rounded shape of the aluminium drive cover ensures any residue cleaning product will run off.

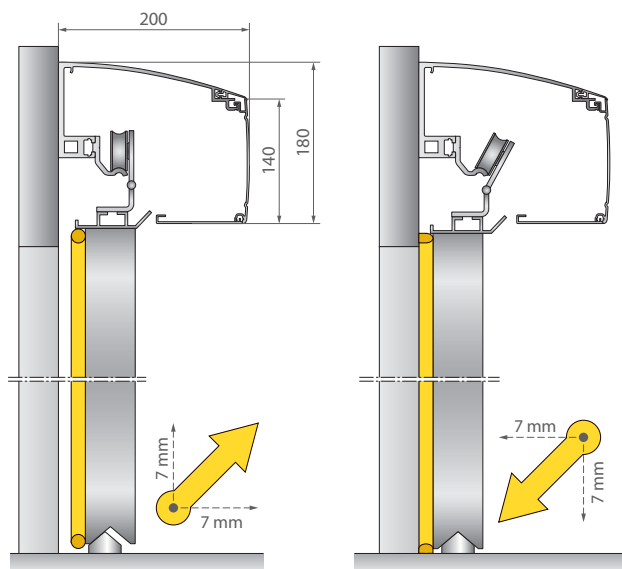

Technical data

Mains power supply	230 VAC, 50 Hz
	115 VAC, 60 Hz
Protection rating	IP 20
Control voltage	24 VDC
Power consumption	280 W
Ambient temperature	- 15 ... + 50 C

Application limits

Single door leaf version

Clear width LB	800 2000 mm
Clear height LH	optimal 2100 mm
	possible up to 2400 mm
Max. door leaf weight	120 kg

Our range of standard door leaves

Air permeability	Class 2 (EN 12207)
Door leaf finish	Formica-high pressure laminate or polished stainless steel
Door leaf frame	Colourless anodised aluminium
Emergency-opening mechanism	Emergency operating lever with colourness anodised finish
Window types	• 2 x 6 mm ESG, for flush mounting
	• IV 24 mm
	• 6 mm ESG (safety glass)
Frame	• Single frame
	• Double frame, wall thickness 70 - 600 mm
	Colourless anodised aluminium
X-ray shielding	With lead insert and special window (for hermetic doors only)
Sound protection	up to 32 dB

Gilgen Door Systems

Securiparc House, Wimsey Way, Alfreton, Derbyshire, DE55 4LS

Tel: 0800 316 6994, info@gdukds.com
www.gdukds.com